



23-101
5 ADJUSTMENT POINT
FULL BODY HARNESS



23-103
5 ADJUSTMENT POINT
FULL BODY HARNESS
WITH POSITIONING RINGS

This Class-A fall arrest harness utilizes a 1¾" polyester webbing that is supremely strong and durable. It incorporates a dorsal D-ring certified for fall arrest, 5 independent points of adjustment and pass-through leg connections. It is CSA certified and compliant with OSHA and ANSI regulations.

- Extremely strong and durable 1¾" polyester webbing
- 5 independent adjustment points
- Back D-ring certified for fall arrest
- 23-103 has side D-rings for work positioning
- Pass-through leg and chest connections
- CSA Z259.10 certified, OSHA & ANSI compliant
- Universal small — large size

23-172

6' SHOCK ABSORBING LANYARD

This shock absorbing lanyard is intended for use as a component of a fall arrest system where the user's weight is within the range of (68.1 — 140 kg (150 — 310 lb)). It is designed to be easy to inspect and highly durable, and is CSA certified.

- Easy to inspect
- Highly durable
- Snaphook ends
- CSA Z259.11 certified And OSHA/ANSI Compliant




23-163

6' TWIN-LEGGED SHOCK ABSORBING LANYARD

The twin shock absorbing lanyard allows continuous connection (tie-off) while the user moves between anchorage locations. It is intended for use as a component of a fall arrest system where the user's weight is within the range of (68.1 — 140 kg (150 — 310 lb)). It is designed to be easy to inspect and highly durable, and is CSA certified.

- Easy to inspect
- Highly durable
- One snaphook and two rebar hooks
- CSA Z259.11 certified And OSHA/ANSI Compliant

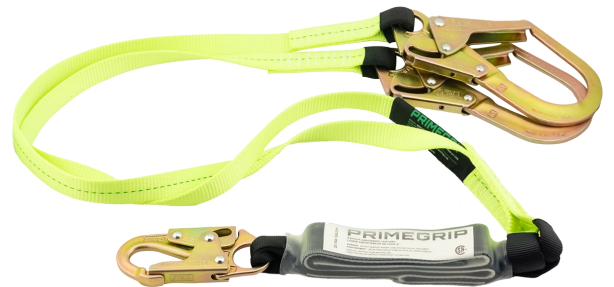

23-202

ROPE GRAB WITH SHOCK ABSORBING LANYARD

This rope grab is integrated with a 2' lanyard certified for use in fall arrest, and is designed with a double-locking closing mechanism and a large ring for direct web or snap hook attachment. Compatible with rope 5/8" in diameter, this fall arresting device can be easily attached to any point on the lifeline, and features "hands-free" operation on weighted vertical safety lines.

- Double-locking closing mechanism
- Hinge design permits attachment anywhere on lifeline
- Large ring for direct web attachment or snaphook connection
- Moves freely along rope on brass rollers
- Features a 2' external shock pack
- CSA Z259.11 certified and OSHA/ANSI compliant





VERTICAL LIFELINE

NOW AVAILABLE AT
Bickles Hardware | Niagara Falls, ON
905-356-8151 | bickleshardware.com



Newly redesigned Primegrip 3-strand vertical lifeline with snaphook.

- 3,600 lb gate strength and double locking snaphook with adhesive PVC cover
- Resists UV exposure, abrasion and water absorption
- Can be used with mechanical and prussic rope grabs
- CSA certified and compliant with OSHA and ANSI standards.
- Available In 25', 30', 50' And 100' Lengths

Part #	Length	Case Qty
23-254	25'	6
23-255	30'	6
23-263	50'	4
23-264	100'	2



ROOFER'S FALL PROTECTION KITS

NOW AVAILABLE AT
Bickles Hardware | Niagara Falls, ON
905-356-8151 | bickleshardware.com



23-440
25' FALL PROTECTION KIT

23-450
50' FALL PROTECTION KIT

1

5 ADJUSTMENT POINT FULL BODY HARNESS

This Class-A fall arrest harness utilizes a 1¾" polyester webbing that is supremely strong and durable. It incorporates a dorsal D-ring certified for fall arrest, 5 independent points of adjustment, and is compliant with all CSA, OSHA, and ANSI regulations. It is universal sized and features pass through leg connections.

2

ROPE GRAB WITH 2' ENERGY ABSORBER

Rope grab integrated with a 2' lanyard CSA-certified for use in fall arrest designed with a double-locking closing mechanism and a large ring for direct web or snap hook attachment. Compatible with 5/8" diameter rope, it can be attached to any point on the lifeline.

3

REUSABLE HINGE-TYPE ROOF ANCHOR WITH FASTENERS

Reusable, easy to install anchorage connector with dual plates. Fits up to 12/12 roof pitch and can be conveniently installed with the fasteners provided.

4

SINGLE HOOK LIFELINE

3-strand lifeline with a single snaphook. The hook is designed with a double-locking mechanism and has a gate strength of 3,600 lb. The rope resists UV exposure, abrasion and water absorption. Primegrip Fall Protection Kits are available with 25' or 50' lifelines.

5

STORAGE PAIL

Lightweight, plastic pail fits all components for a simple and convenient storage solution, so your fall protection is ready to go when you are.